




Square Picnic Table

TOOLS REQUIRED:

CORDLESS DRILL OR RATCHET WRENCH
9/16" SOCKET



MATERIALS

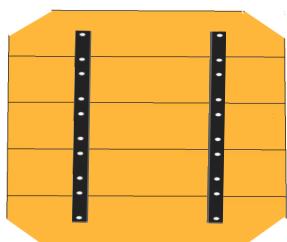


(1) TABLE TOP




(4) SEAT SLATS



(4) CONNECTOR
BRACKETS

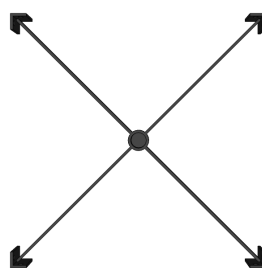

(1) BASE SUPPORT

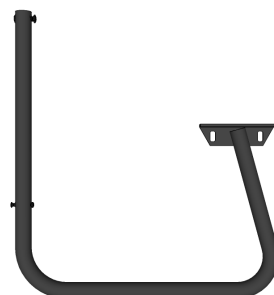

(8) BASE COMPONENTS



(16) 3/8" x 2 1/4" CARRIAGE BOLTS



(12) 3/8" x 2 1/2" HEX BOLTS



(4) 3/8" x 3" HEX BOLTS



(32) LOCK WASHERS & HEX NUTS
(24) FLAT WASHERS

INSTRUCTIONS

-Check materials list to verify all items have been shipped. Extra hardware may be included.

-Assemble table on a flat and level surface. Two people may be required for assembly.

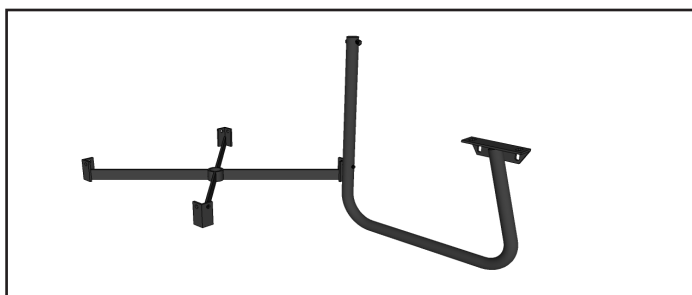


Illustration A

1. Align base component and base support at corresponding holes. Attach using 3/8 x 2 1/2" hex bolts, flat washers, lock washers, and hex nuts. See Illustration 'A'.

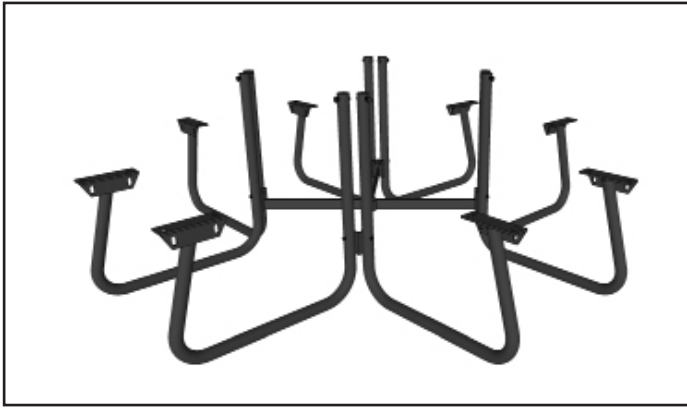


Illustration B

2. Repeat Step 1 with all base components. See Illustration 'B'.



Illustration C

3. Attach seats to the base components using 3/8" x 2 1/4" carriage bolts, lock washers & hex nuts. See Illustration 'C'.

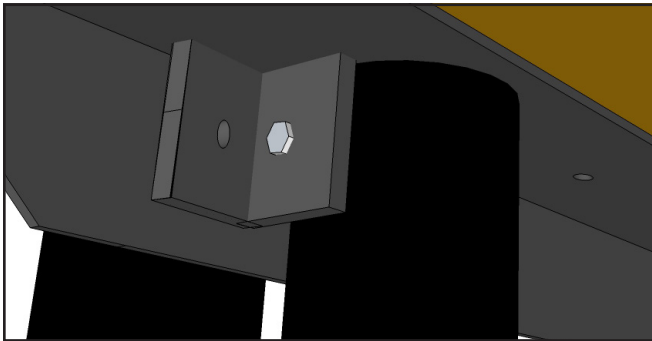


Illustration D

CAUTION- Step 4 Will Require Two People to Lift the Top Into Place.

4. The assembled table top is placed with the support frame fit between the base component uprights. See Illustration 'D'. The four connector brackets will be used to connect the base components together and the table top support frame to the bases.

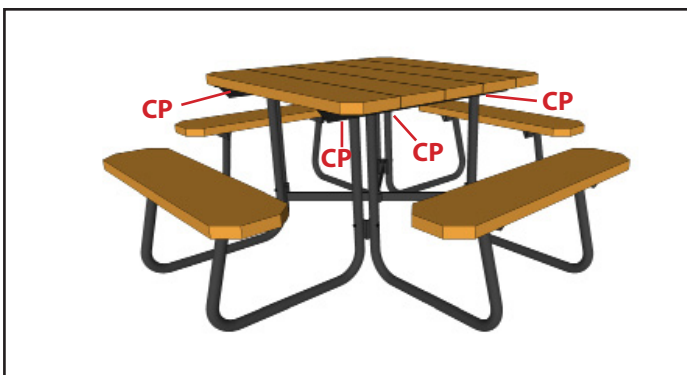


Illustration E

5. Attach one side of connector bracket to a base component using 3/8" X 2 1/2" hex bolts, flat washer, lock washer & hex nut. See Illustration 'D'. Place a 3/8" x 3" hex bolt through aligned holes of the connector bracket, table top support and base component, fasten using flat washer, lock washer & hex nut. Repeat at all connection points (CP). See Illustration 'E'.

6. Tighten all hardware and permanently attach the assembled table to a solid surface if desired or required with the proper mounting hardware, not included.