





Toddler Table 6 Ft

Assembly Instructions

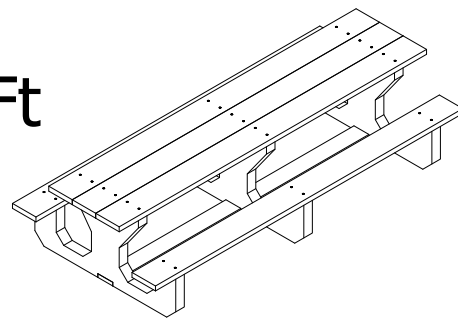


Tools for Assembly: Powered Driver & Phillips Bit
Drill & 1/8" Drill Bit
Tape Measure


Components



(3) Table Bases



(5) Table & Seat Slats




(1) Base Support



(36) 2 1/2" Hex Lag Screws


Step by Step Assembly

Before you begin: Check components to verify all are included. Assembly requires two people and must be performed on a flat and even surface. Do not overtighten hardware as damage can occur.

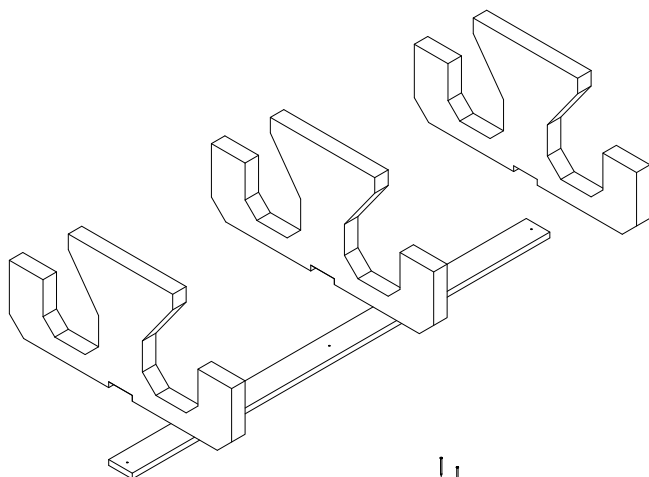

Step 1


Position the three (3) bases spaced evenly on a flat surface. The center base will be approximately at 30" on center from the two (2) outer bases. Ensure all three (3) bases are square and plumb. The base support can be used to assist in proper alignment and spacing. The base support slat will be attached later in assembly.

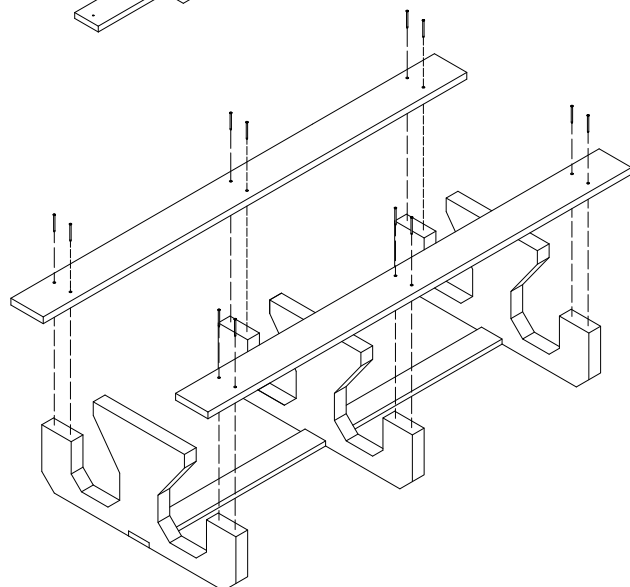

Step 2


Place a seat slat flat across all three bases with pre-drilled holes aligned at the center point of each base. Drill a starter hole and attach using the included screws. DO NOT OVERTIGHTEN. Repeat for other side.

Step by Step Assembly Continued

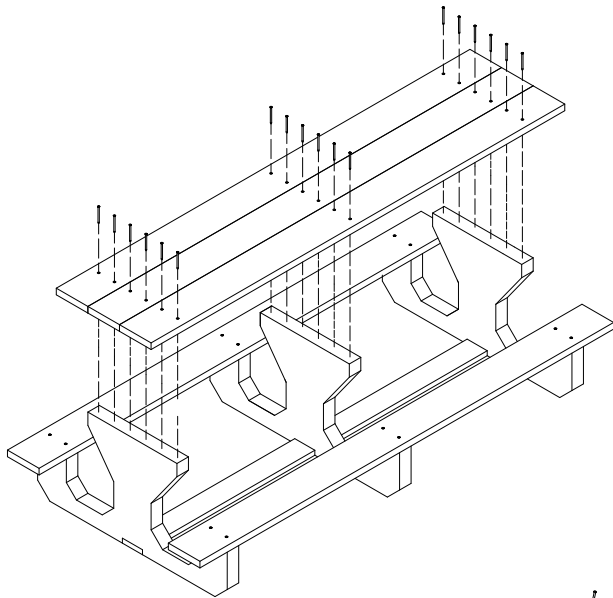

Step 3


Place the table top slats on top of the bases with pre-drilled holes at center of each base. Ensure the top slats are aligned and square. Drill a starter hole in the base tops and attach the top slats with the included screws. **DO NOT OVERTIGHTEN.**

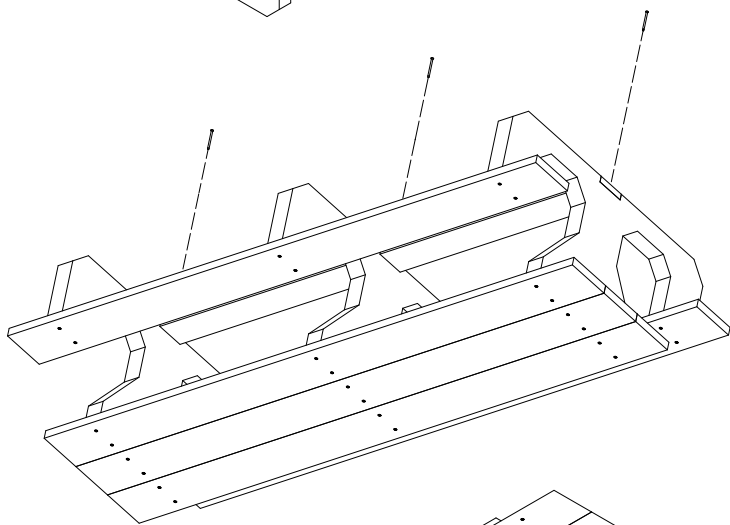

Step 4

Two or more people are required for this step. Carefully rotate the table to rest it flat on the top. Attach the base support slat to the bottom of each base.

Table can now be returned to the upright position.

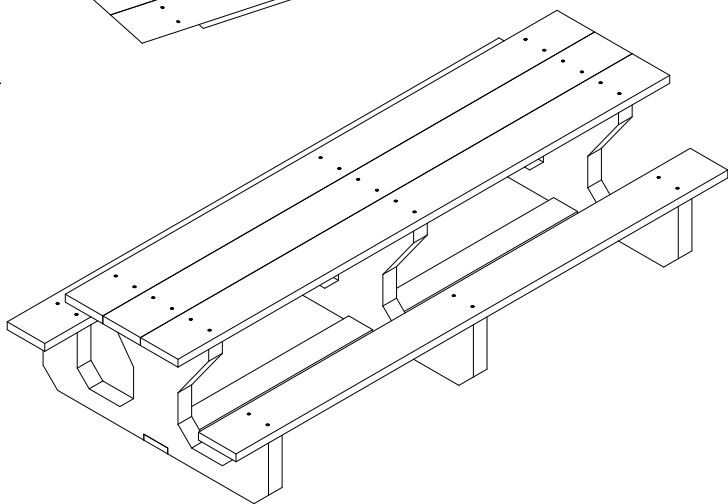

Cleaning Tips

Frog Furnishings products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Frog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.