


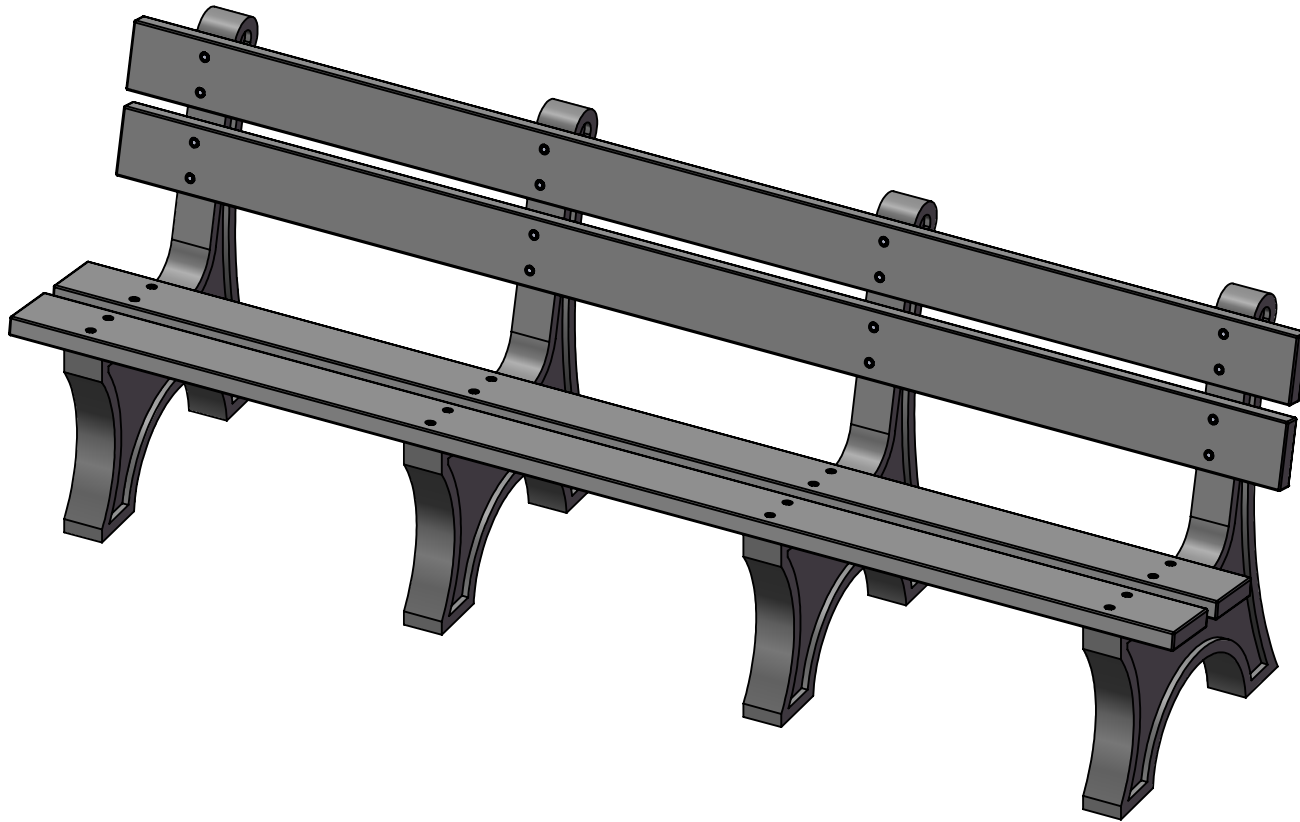

Model # PB 8__COLE


SAFETY WARNINGS & EQUIPMENT INSPECTION

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Frog Furnishings products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Frog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.

HARDWARE




3 1/2" Hex Lag Bolt



1/4" Flat Washer


TOOLS REQUIRED

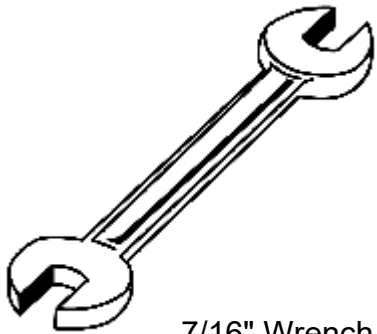


7/16" Wrench



7/16" Socket Wrench



Tape Measure

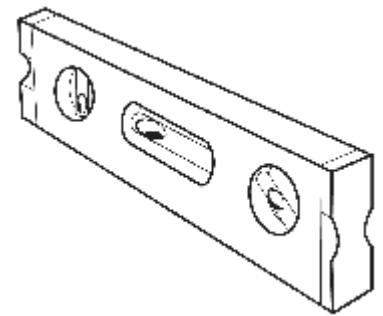

Level

PRODUCT SPECIFICATIONS

PB 8 COL 8' COLONIAL BENCH


Planks: 2" x 6" recycled plastic planks.

Legs: 3-1/8" Thick Molded Plastic Leg

Hardware: Stainless Steel plated fasteners.

Dimensions: Outside to outside dimension is 24-9/16" x 96".

COMPONENTS

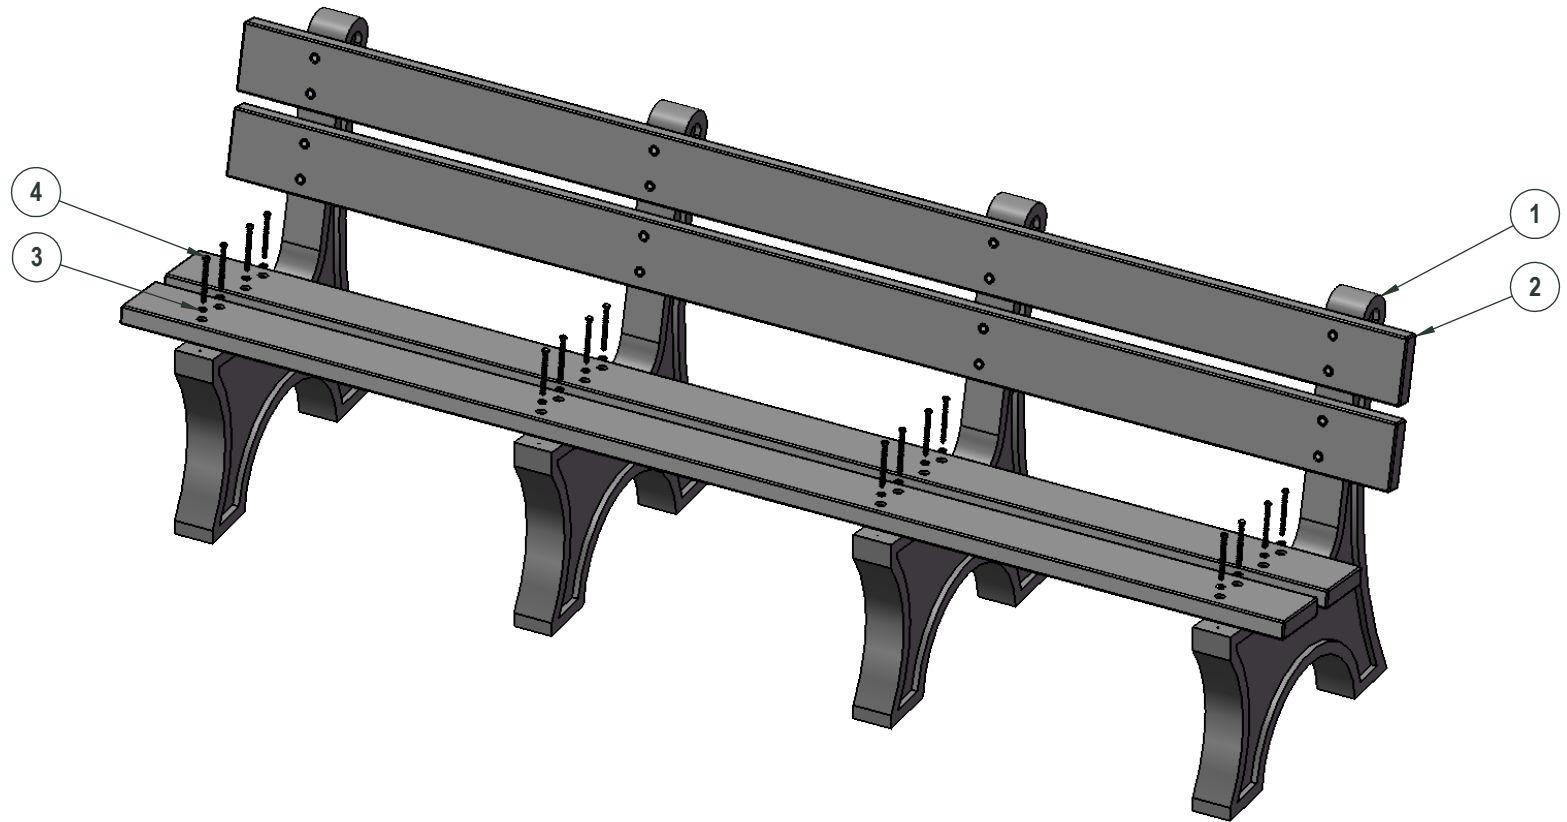

1. Start the lag bolts with flat washers in each of the pre-drilled holes in one of the bench slats, allow the end of the bolts to extend 1/4" beyond the surface of the slat. Align the bolts with the pilot holes in the legs and attach, do not overtighten bolts.

DO NOT overtighten lag bolts as this can damage the plastic bases.

ITEM NO.	DESCRIPTION	Qty.
1	Colonial bench leg	4
2	8' 2x6 bench plank	4
3	1/4" flat washer SS	32
4	1/4" x 3-1/2" lag bolt, SS	32

OVERALL DIMENSIONS

