


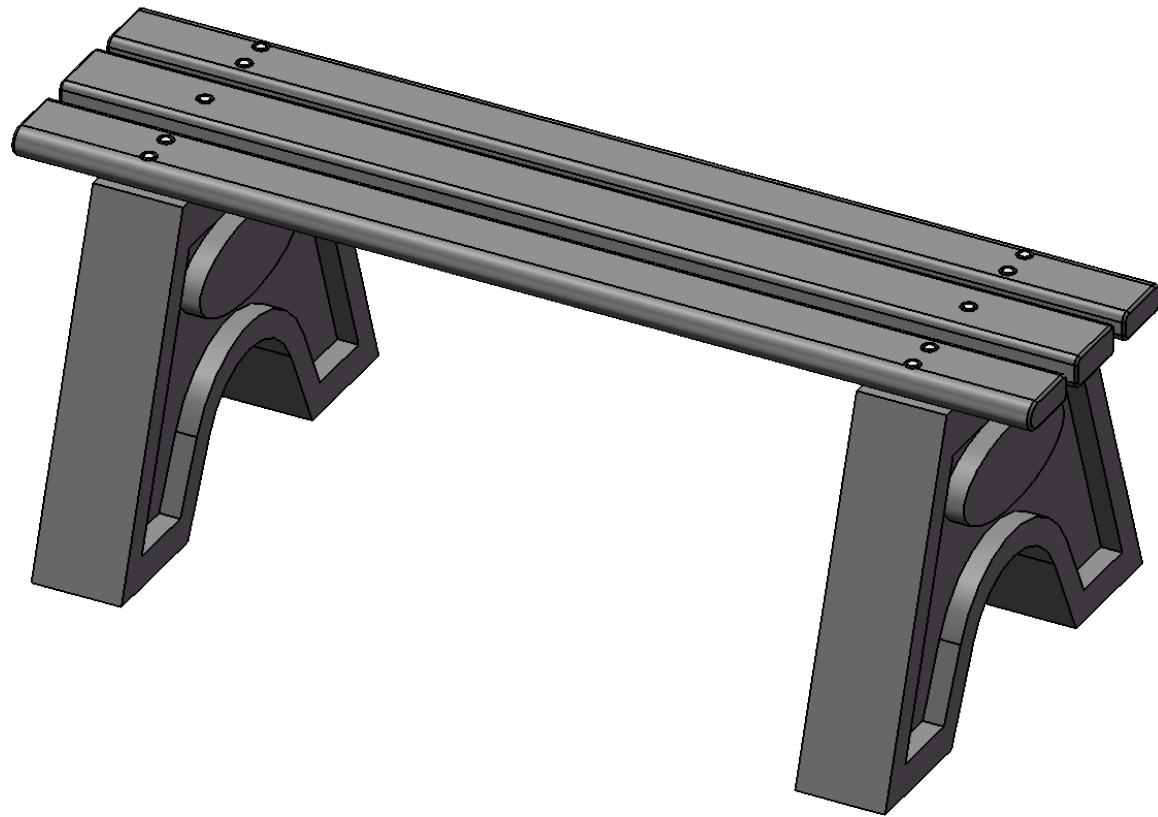

Model # PB 4___SPOE


SAFETY WARNINGS & EQUIPMENT INSPECTION

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Frog Furnishings products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Frog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.

HARDWARE




3 1/2" Hex Lag Bolt



1/4" Flat Washer


TOOLS REQUIRED

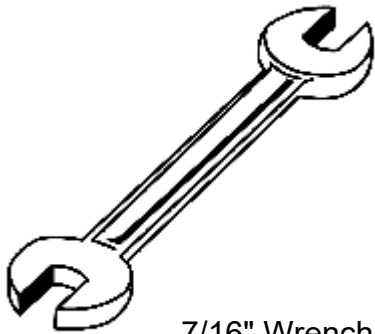


7/16" Wrench



7/16" Socket Wrench



Tape Measure

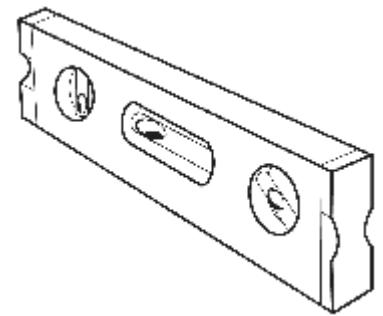

Level

PRODUCT SPECIFICATIONS

PB 4__SPOE 4' SPORT BENCH



Planks: 2" x 4" recycled plastic planks.

Legs: 4-1/4" Thick Molded Plastic Leg

Hardware: Stainless Steel plated fasteners.

Dimensions: Outside to outside dimension is 11-7/8" x 48".

COMPONENTS

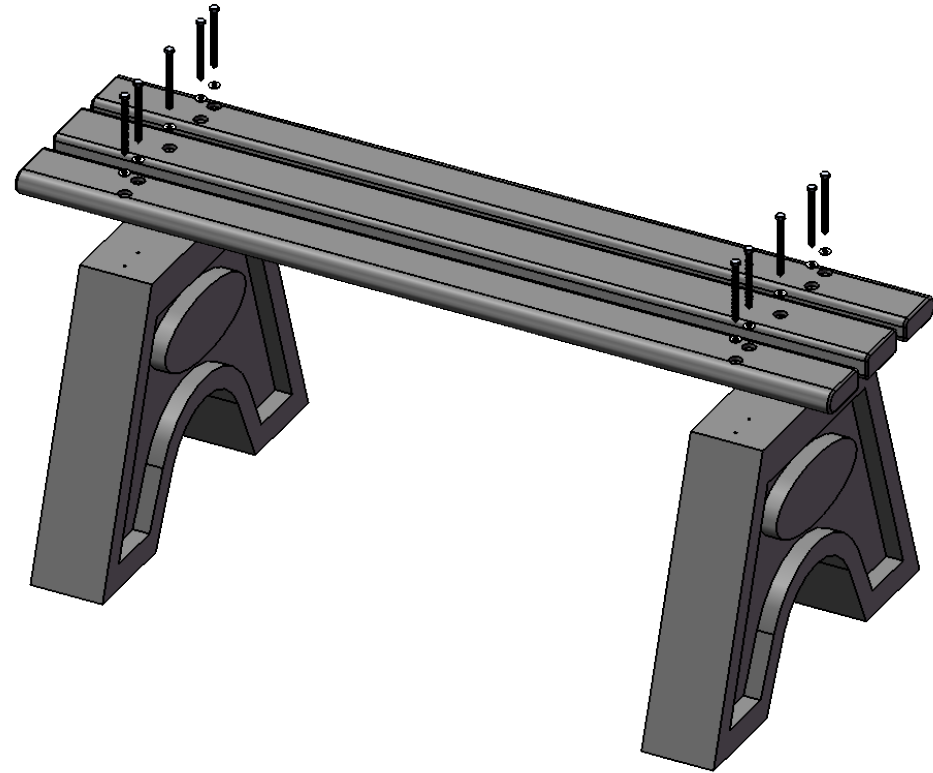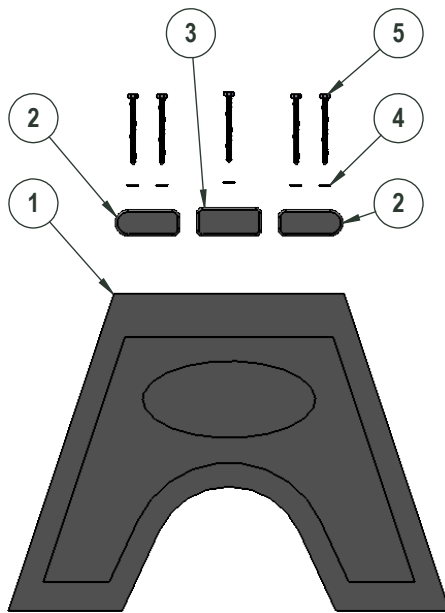

Step 1

Set the two bench bases in the upright position and parallel to each other 31 3/4" apart.

Step 2

Lay the two bullnose bench slats across the bases with one towards the front and the other to the back, the other bench slat will lie evenly spaced between the bullnose slats. Align the mounting holes in the slats with the pre-drilled holes in the bases. Attach using the hex lag bolts and flat washers, do not over-tighten.

ITEM NO.	DESCRIPTION	Qty.
1	PB 1001 bench support	2
2	4' 2x4 bullnose bench plank (4 holes)	2
3	4' 2x4 bench plank	1
4	1/4" flat washer SS	10
5	1/4" x 3-1/2" lag bolt, SS	10

DO NOT overtighten lag bolts as this can damage the plastic bases.

OVERALL DIMENSIONS

